


LS-218R1-16-1TP

CABLE INCENDIO #16/1 PAR

LinkStar Cable FPL #16/1 Twisted Pair

Certificate Number E536107

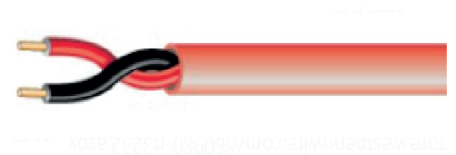

Construction & Dimensions

Number of Conductors	2 TP
AWG Size	16AWG
Conductor Stranding	Solid
Conductor Type	Bare copper or Tinned copper
Min. Insulation Resistance	Individual conductors > 200Mohm x km at +20°C
Jacket:	Fire Resistance PVC
Sheath:	Screen Polyester tape 50% overlap Aluminum/ Polyester tape,metallic side down, in contact with drain wire or not
Insulation /mm PVC	1.70±0.1 mm
Bend Radius	8* Overall diameter
Jacket/mm	4.3±0.2 mm
Insulation Color Code	1. Black 2. Red

Overall Electrical & Optical Characteristics

UL Flammability	UL1666
Operating Temperature	+105°C
Installation Temperature:	-5°C to +50°C
Voltage Rating	300/500V
Test Voltage:	2000V ac

